


Switches disassembly



1.
1x pointed tweezers

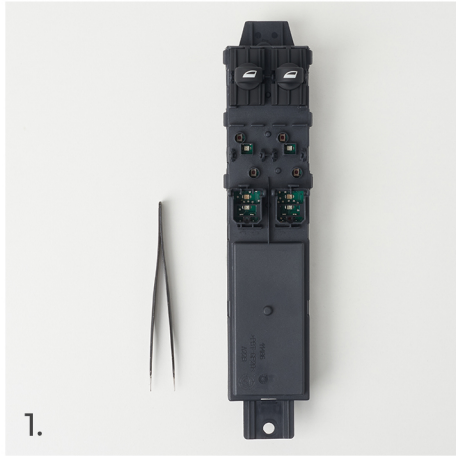

2.
This is where you need to place the top of tweezers to prevent switch damage.



3.
Always start from the outside of the switch.
Start from the top and place the tweezers in the area shown in the previous image.




4.
Gently pry the switch with the top of the tweezers.



5.
Gently pry the switch with the top of the tweezers.



6.
Stop in this position when the switch is free on one side.

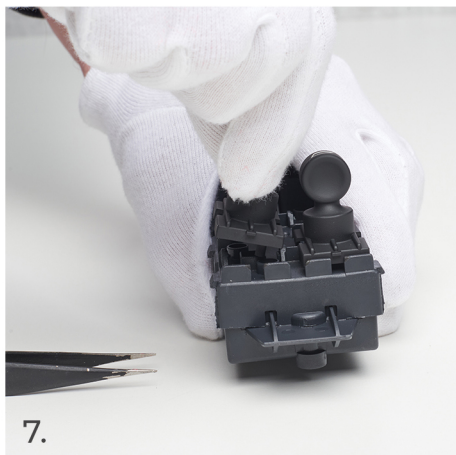

7.
Grab the switch and pull it slightly towards you to release it from the assembly.



8.
Always start from the outside of the switch.
Start from the top and place the tweezers in the area shown in the previous image.



9.
Gently pry the switch with the top of the tweezers.
Proceed in the same way as with the previous switch.

Switches assembly




1.
Hold the switch in a position like in the picture above.



2.
Insert the central protrusion at the bottom of the switch into the central inner part of the assembly.



3.
Gently press down on the switch from above and snap its outer side protrusion into the assembly.

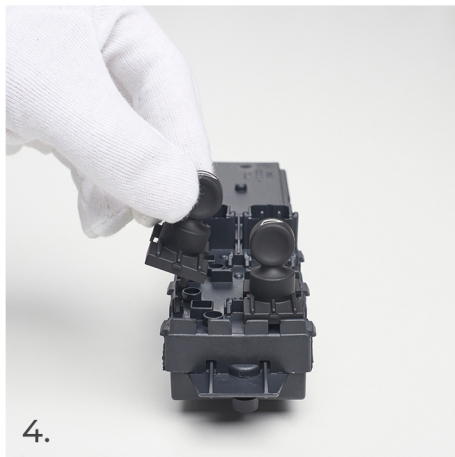

4.
Hold second switch in a position like in the picture above.




5.
Insert the central protrusion at the bottom of the switch into the central inner part of the assembly.



6.
Gently press down on both the front and rear parts of the switch base simultaneously and snap its outer side protrusion into the device.



7.
Check both switches to ensure they are correctly seated in the device.
If a switch is improperly installed, do not use force. Instead, carefully remove the switch using tweezers and attempt the installation again.

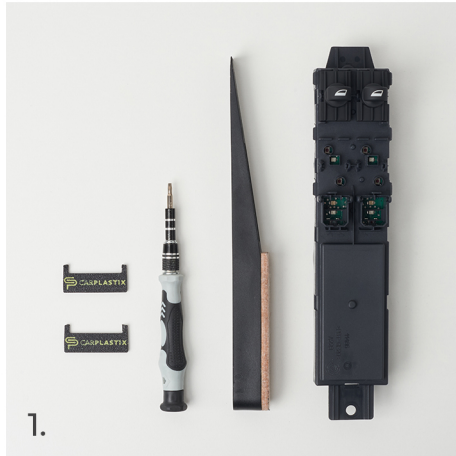

1.
1x torx screwdriver T10
1x plastic mounting wedge

A safer disassembly method is to proceed after removing the switches.



Unscrew the first screw at the bottom of the assembly.



3.
Unscrew the second screw at the bottom of the assembly.



4.
Insert the wedge into the side gap between the top and bottom parts of the assembly at the latch location, pushing it in up to the edge of the latch.




5.
Move the wedge upwards to release the latch.



6.
Repeat the same process for the second latch.




7.
Repeat the same process for the third latch.

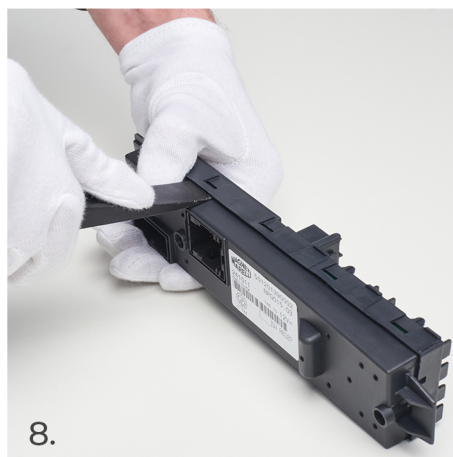


8.
Repeat the same process for the fourth latch.


Using the same method, release all four latches on the other side of the assembly.

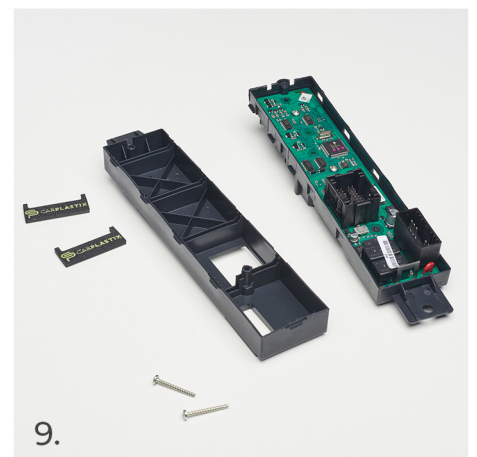


9.
Separate the bottom cover of the assembly.

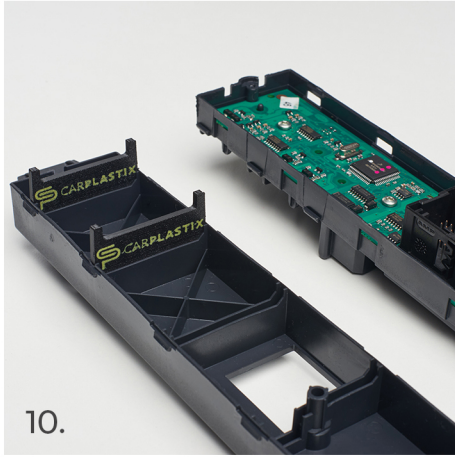


10. Insert the reinforcements into the first and second gaps above which the switches will be located after assembly.

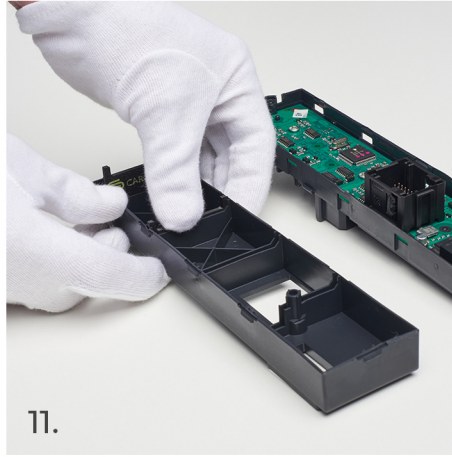

11. Press firmly and evenly on both ends of the first reinforcement several times to ensure it fits completely into the bottom cover.

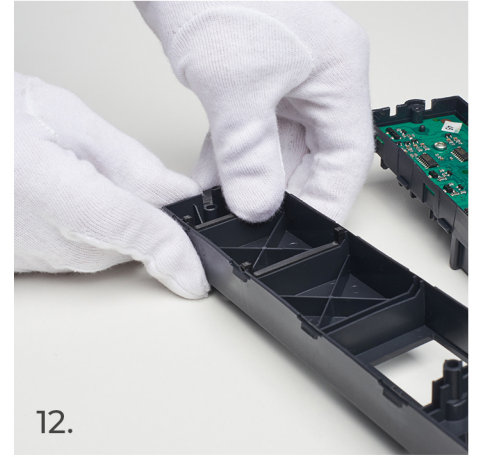

12. Press firmly and evenly on both ends of the second reinforcement several times to ensure it fits completely into the bottom cover.

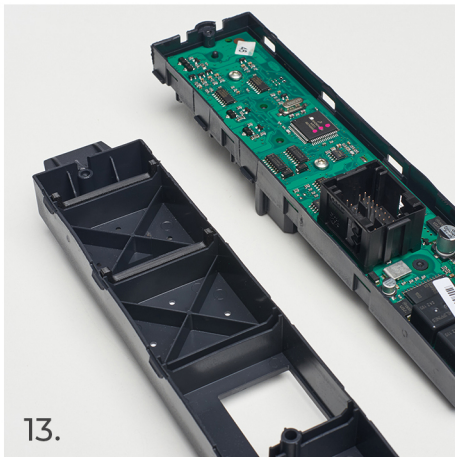

13. If the reinforcements are inserted as shown in the image, you can snap both parts of the assembly together.



14. Check that all four latches on both sides of the assembly are properly snapped into place.



15. Screw the first screw back into the assembly.



16. Screw the second screw back into the assembly.